


Product Data Sheet

6/29/2024

Tacker System

UK - Myson

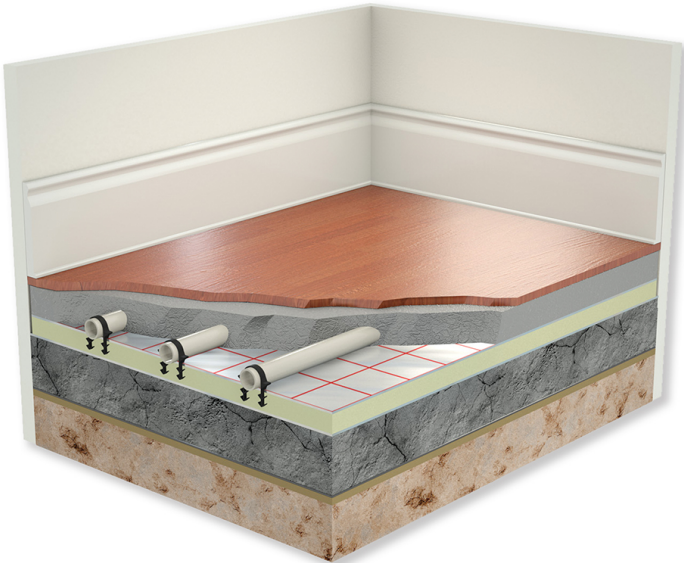

Description

• Comfortable climate

Perfectly controlled

Purmo panel heating and cooling ensures pleasant temperatures in buildings.

Depending on the occupants' usage and habits, the temperature control can be set individually for individual rooms or areas.

This means:

wireless or wired control components. In addition to the

The heating function can optionally also be used for cooling via the same system. And what's more:

Combined with radiators, surface heating and cooling will be the ultimate solution

comfortable room temperature all year round, whether in new buildings or renovations.

How Purmo works

Setting the temperature

With Purmo's complete range

control for surface heating and cooling systems, you can optimally control the temperature

Controlled By Easy to use without large

Programming skills are a matter of course. The control system consists of

Essentially from the three component groups room controllers, switching strips and

Actuators. A room controller is installed in each room, which controls the room temperature

and regulates to the set desired temperature. As required and

Different controller versions with different functional scopes are available for this purpose. The

Signals from the room controller are sent to

switching strip, which is usually located in the distribution cabinet directly on the

heating circuit distributor.

The switching strip can transmit signals from up to

six or ten room controllers.

The control unit in turn issues the commands

to the actuator mounted directly on the heating circuit distributor, which opens and closes the supply

warm water in the respective heating circuit. The Unisenza

Switch strip is also suitable for cooling operation.

Choose between wired or wireless

Regulating

Depending on the circumstances, wire-bound

and wireless room controllers. The wired control is particularly suitable for new buildings and draws

due to a high degree of protection against external interference.

The controller is connected to the control unit via a cable and

click-fit on a flush-mounted unit.

With radio control, communication takes place between

Room controller and control unit via radio. This solution is ideal for

Renovation because no cables need to be laid between room and switchboard.

rolljet/rolljet S

• For pipe dimensions 14, 16, 17 and 20 mm

• Fastest installation for any

Room geometry and any pipe spacing

• The right insulation for every application

• Minimal scrap avoids unnecessary

waste and reduces material costs

Warranty

For your additional peace of mind, Purmo Group gives the following Warranty against manufacturing defect. Your statutory rights are not affected by this Warranty.

Subject as provided below, Purmo Group warrants to the original purchaser at the original installation site that its products will be free from defects in materials and workmanship for the following periods:

- Hydronic Radiators: 10 years from date of purchase.*
- Fan Assisted Radiators (ULOW-E2): 2 years from date of purchase.*
- Fan Convectors: 2 years from date of purchase.
- Hydronic Underfloor Heating: 10 years for the pipe from date of purchase.
- Hydronic Underfloor Heating: 2 years on accessories, actuators, ball valves, controls, expansion vessels, fittings, low loss headers, manifolds, mixer control groups & tooling from date of purchase.
- Hydronic Underfloor Heating: 12 months on all pumps from date of purchase.
- Electric Underfloor Heating: 10 years from date of purchase (except programmer & sensor).
- Electric Radiators and Towel Warmers: 2 years from date of purchase.*
- Hydronic Towel Warmers: 5 to 10 years from date of purchase depending on product type.*
- Myson Radiator Valves and Controls: 2 years from date of purchase.

*Products which are exposed to prolonged extreme conditions, such as high humidity or severe cold/condensation, may be subject to deterioration. This is not a result of any manufacturing defect. Products installed in these circumstances will be subject to a warranty period of twelve months only.

The original purchaser's remedy for breach of this Warranty is expressly limited to repair or replacement of any part or parts found to be defective under conditions of normal service and use during the above Warranty period and does not extend to Purmo Group being liable for any incidental, special or consequential damages or losses whatsoever, such as loss of use of the product, inconvenience or lost profits.

This Warranty does not cover any defect, damage or malfunction in the product which is due to: failure to comply in any respect with Purmo Group's installation, maintenance or operating instructions; faulty storage,

handling, installation or repair; mis-use; neglect; accident; abuse; or general wear and tear.

Before this warranty can be activated, the original purchaser will be required to prove, with supporting documentation, the date and place of purchase, as Purmo Group may need to conduct its investigation into

the alleged defect. This should be within 28 days of the date when the defect was discovered or ought to have reasonably discovered the defect.

Purmo Group reserves the right to make a reasonable charge for inspecting and testing any product which is subject to a Warranty claim and the rights conferred by the Warranty are conditional upon the payment of such charge. The charge may be made, at Purmo Group's discretion, either before or after the inspection and testing of the product. In the event that it is established to Purmo Group's reasonable satisfaction that a valid Warranty claim has been made in respect of the product, then any inspection charge which has been paid will be refunded in full by Purmo Group.

Specification

Feature	Unit	Value
---------	------	-------

Resources

Document Description	Document Type	Link
----------------------	---------------	------

Items

Global Item Code	Item Description
------------------	------------------
