


# Product Data Sheet

12/17/2024

Electric Radiators

## Innoko

UK - Myson

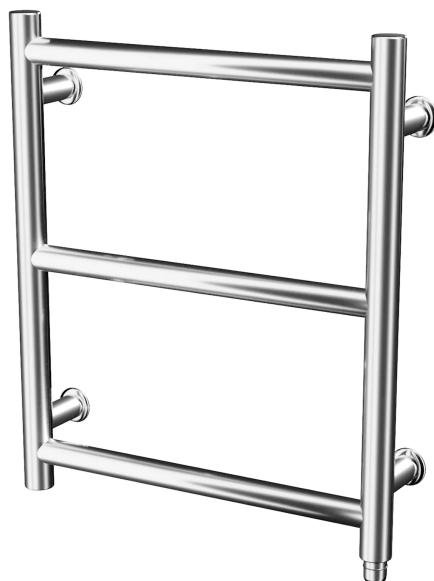

- Easy to install
- Low Maintenance
- Left and right hand options
- Straight or curved models
- Advanced element technology

## Description

Simple and attractive, Myson Innoko has been designed with a small bathroom, kitchen or cloakroom in mind. This chrome-finished electric towel warmer is available in straight or curved models, with left and right hand options. Innoko is easy to install, virtually maintenance free and can be used alongside the Myson Kickspace® to provide the perfect drying and heating solution for any kitchen. Myson Innoko is fitted with APM® technology which represents the most advanced element technology available. It is an economical, self-regulating element which, when it reaches the required temperature, reduces power consumption accordingly. There is no need for a thermostat as the required temperature is achieved smoothly and stays constant.

## Area of Application

The Innoko electric towel radiator is ideal for small bathrooms, kitchens, and cloakrooms. Suitable for dense spaces where a compact and efficient heating solution is needed. Utilizes self-regulating APM technology and features a high-quality chrome finish for durability and style.

## Selection Criteria

Available in straight or curved models with either left or right-hand options, finished in Chrome. For custom selections, utilize our design service or quick selection brochure.

## Basic User Instructions

Supplied with wall bracket, screws and wall fixings. Installation must follow electrical safety standards, ensuring the switched fused spur is located outside the bathroom as per BS 7671. Easy to install and virtually maintenance-free.

## Prescription text specifiers

The Innoko electric towel radiator combines style and efficiency, ideal for small spaces like bathrooms and kitchens. Manufactured from steel and utilizing APM technology, it ensures self-regulating heat. The unit is filled with a glycol mix, part water/part anti-freeze. It comes in both straight and curved models, with either left or right-hand connections for flexible installation. The product includes wall brackets, screws, and fixings. It complies with BS 7671 standards, requiring the switched fused spur to be outside the bathroom. Available in a high-quality chrome finish, it's virtually maintenance-free and easy to install.

## Warranty

For your additional peace of mind, Purmo Group gives the following Warranty against manufacturing defect. Your statutory rights are not affected by this Warranty.

Subject as provided below, Purmo Group warrants to the original purchaser at the original installation site that its products will be free from defects in materials and workmanship for the following periods:

- Hydronic Radiators: 10 years from date of purchase.\*
- Fan Assisted Radiators (ULOW-E2): 2 years from date of purchase.\*
- Fan Convectors: 2 years from date of purchase.
- Hydronic Underfloor Heating: 10 years for the pipe from date of purchase.
- Hydronic Underfloor Heating: 2 years on accessories, actuators, ball valves, controls, expansion vessels, fittings, low loss headers, manifolds, mixer control groups & tooling from date of purchase.
- Hydronic Underfloor Heating: 12 months on all pumps from date of purchase.
- Electric Underfloor Heating: 10 years from date of purchase (except programmer & sensor).
- Electric Radiators and Towel Warmers: 2 years from date of purchase.\*
- Hydronic Towel Warmers: 5 to 10 years from date of purchase depending on product type.\*
- Myson Radiator Valves and Controls: 2 to 5 years from date of purchase, depending on range.

\*Products which are exposed to prolonged extreme conditions, such as high humidity or severe cold/condensation, may be subject to deterioration. This is not a result of any manufacturing defect.

Products installed in these circumstances will be subject to a warranty period of twelve months

only.

The original purchaser's remedy for breach of this Warranty is expressly limited to repair or replacement of any part or parts found to be defective under conditions of normal service and use during the above Warranty period and does not extend to Purmo Group being liable for any incidental, special or consequential damages or losses whatsoever, such as loss of use of the product, inconvenience or lost profits.

This Warranty does not cover any defect, damage or malfunction in the product which is due to: failure to comply in any respect with Purmo Group's installation, maintenance or operating instructions; faulty storage,

handling, installation or repair; mis-use; neglect; accident; abuse; or general wear and tear.

Before this warranty can be activated, the original purchaser will be required to prove, with supporting documentation, the date and place of purchase, as Purmo Group may need to conduct its investigation into

the alleged defect. This should be within 28 days of the date when the defect was discovered or ought to have reasonably discovered the defect.

Purmo Group reserves the right to make a reasonable charge for inspecting and testing any product which is subject to a Warranty claim and the rights conferred by the Warranty are conditional upon the payment of such charge. The charge may be made, at Purmo Group's discretion, either before or after the inspection and testing of the product. In the event that it is established to Purmo Group's reasonable satisfaction that a valid Warranty claim has been made in respect of the product, then any inspection charge which has been paid will be refunded in full by Purmo Group.

# Specification

Feature	Unit	Value
Etim Class		EC000593 - Radiator (electric)
Model		Low (30-50 cm)
Mounting method		Wall model
Mounting direction		Vertical
Number of ribs		3
Material front		Steel
Material heating element		Steel
Oil-/fluid-filled		Yes
With decorative finish		Yes
Heating capacity	Watt (W)	40
Supply voltage min	Volt (V)	220 - 240
Frequency supply voltage min	Hertz (Hz)	50, 50 - 50
Electrical connection		Connection cable with plug
Connection cable length	Metre (m)	0.125
Length connection cord	Metre (m)	0.125
Position control panel		None
Suitable for wireless remote control		No
With remote control		No
Power control		Mechanical
Air exhaust		Other
Colour		Chrome
Width	Millimetre (mm)	450
Height	Millimetre (mm)	500
Depth	Millimetre (mm)	98, 107
Weight	Kilogram (kg)	5
Degree of protection (IP)		IP64
Protection class		I
With overheating protection		Yes
Frost protection circuit		No
Digital indication		No
With presence indicator		No
With time switch clock		No
Programmable		No
Adaptive (self-learning)		No
Consumption indication		No
Open window detection		No
Compatible with Apple HomeKit		No

Feature	Unit	Value
Compatible with Google Assistant		No
Operation by app		No
Compatible with Amazon Alexa		No
IFTTT support available		No
Number of supported pilot wire commands		None

# Resources

Document Description	Document Type	Link
Myson Innoko Brochure	Brochure	<a href="https://asset.productmarketingcloud.com/api/assetstorage/3577_c87559ca-76df-4970-903d-6f19b8ae4148">https://asset.productmarketingcloud.com/api/assetstorage/3577_c87559ca-76df-4970-903d-6f19b8ae4148</a>
Myson Complete Solutions - Full Brochure	Brochure	<a href="https://asset.productmarketingcloud.com/api/assetstorage/3577_24872a57-c3a5-4956-ab4b-dfa3b522c19b">https://asset.productmarketingcloud.com/api/assetstorage/3577_24872a57-c3a5-4956-ab4b-dfa3b522c19b</a>
Brochure	Brochure	<a href="https://asset.productmarketingcloud.com/api/assetstorage/3577_19ad1120-20a3-489b-b536-3a7c36b17752">https://asset.productmarketingcloud.com/api/assetstorage/3577_19ad1120-20a3-489b-b536-3a7c36b17752</a>

# Items

Local Code	Global Item Code	Item Description
PETCCR	F6E-MTCPETCC	R/H Chrome Curved 500h x 450w - Innoko
PETCCL	F6E-MTCPETCCL	L/H Chrome Curved 500h x 450w - Innoko
PETSCR	F6E-MTCPETSC	R/H Chrome Straight 500h x 450w - Innoko
PETSCL	F6E-MTCPETSCL	L/H Chrome Straight 500h x 450w - Innoko