


# Product Data Sheet

2/27/2025

Electric Radiators

## Electric Décor Horizontal

UK - Myson

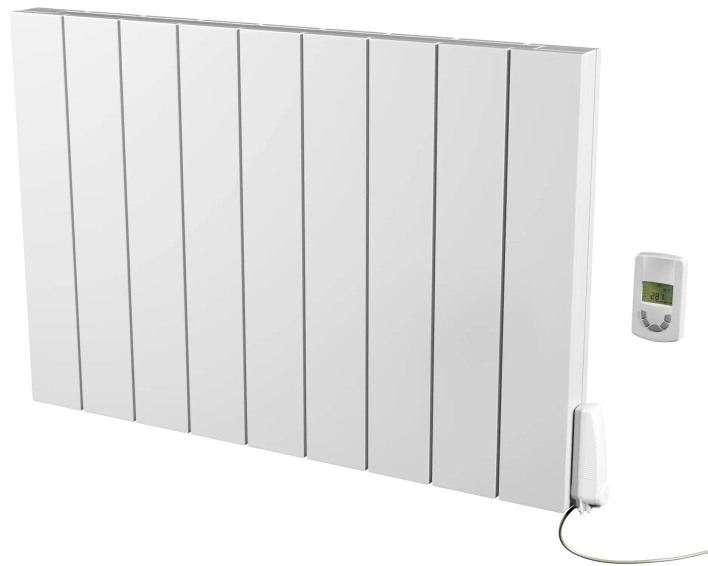

- Stylish contemporary design.
- Easy to control.
- Vertical model available.
- Hydronic option available.
- IP44 rated.

## Description

Myson Electric Décor Horizontal is a stylish, contemporary alternative to a traditional radiator. An electric version of our popular hydronic model, the distinctive flat tube design will enhance the look of any room. It is suitable for a wide range of uses, both domestic and commercial. It is also perfect for projects that are off-gas or have no central heating pipes installed. Vertical model also available for where wall space is limited.

## Area of Application

Electric Décor Horizontal is suitable for a wide range of uses, both domestic and commercial. Ideal for projects off-gas or without central heating pipes. Available in four sizes, 600mm height and lengths from 485mm to 1010mm. Comes with a remote control thermostat. IP44 rated.

## Selection Criteria

For selecting or calculating the thermal heat power output, please use our design service. For quick selection, use our brochure.

## Basic User Instructions

Install the Electric Décor Horizontal using the provided mounting accessories and follow the wiring diagram available on our website. Ensure the power supply is disconnected during installation. Position the radiator at least 150mm from the floor. Use the supplied remote control thermostat for temperature adjustments. For detailed programming, consider the optional TOUCH4 programmer.

## Prescription text specifiers

The Myson Electric Décor Horizontal is a stylish, contemporary alternative to traditional radiators, featuring a distinctive flat tube design. Suitable for a wide range of uses in both domestic and commercial applications, it is ideal for projects off-gas or without central heating pipes installed. The horizontal model is available in four sizes with a height of 600mm and lengths ranging from 485mm to 1010mm. Manufactured from 1.25mm steel with an IP44 rating, it is filled with a glycol mix (part water/part anti-freeze). All models come with a remote control thermostat, with an option for a hard-wired, 4-zone touch screen programmer (TOUCH4). The unit is guaranteed for two years from the date of purchase against manufacturing defects and is finished in white (RAL 9016).

## Warranty

For your additional peace of mind, Purmo Group gives the following Warranty against manufacturing defect. Your statutory rights are not affected by this Warranty.

Subject as provided below, Purmo Group warrants to the original purchaser at the original installation site that its products will be free from defects in materials and workmanship for the following periods:

- Hydronic Radiators: 10 years from date of purchase.\*
- Fan Assisted Radiators (ULOW-E2): 2 years from date of purchase.\*
- Fan Convectors: 2 years from date of purchase.
- Hydronic Underfloor Heating: 10 years for the pipe from date of purchase.
- Hydronic Underfloor Heating: 2 years on accessories, actuators, ball valves, controls, expansion vessels, fittings, low loss headers, manifolds, mixer control groups & tooling from date of purchase.
- Hydronic Underfloor Heating: 12 months on all pumps from date of purchase.
- Electric Underfloor Heating: 10 years from date of purchase (except programmer & sensor).
- Electric Radiators: 10 years from date of purchase on radiator unit\*, electric controls & electronic components; 2 years from date of purchase.\*
- Electric Towel Warmers: 2 years from date of purchase.\*
- Hydronic Towel Warmers: 5 to 10 years from date of purchase depending on product type.\*
- Myson Radiator Valves and Controls: 2 to 5 years from date of purchase, depending on range.

\*Products which are exposed to prolonged extreme conditions, such as high humidity or severe

cold/condensation, may be subject to deterioration. This is not a result of any manufacturing defect. Products installed in these circumstances will be subject to a warranty period of twelve months only.

The original purchaser's remedy for breach of this Warranty is expressly limited to repair or replacement of any part or parts found to be defective under conditions of normal service and use during the above Warranty period and does not extend to Purmo Group being liable for any incidental, special or consequential damages or losses whatsoever, such as loss of use of the product, inconvenience or lost profits.

This Warranty does not cover any defect, damage or malfunction in the product which is due to: failure to comply in any respect with Purmo Group's installation, maintenance or operating instructions; faulty storage,

handling, installation or repair; mis-use; neglect; accident; abuse; or general wear and tear.

Before this warranty can be activated, the original purchaser will be required to prove, with supporting documentation, the date and place of purchase, as Purmo Group may need to conduct its investigation into

the alleged defect. This should be within 28 days of the date when the defect was discovered or ought to have reasonably discovered the defect.

Purmo Group reserves the right to make a reasonable charge for inspecting and testing any product which is subject to a Warranty claim and the rights conferred by the Warranty are conditional upon the payment of such charge. The charge may be made, at Purmo Group's discretion, either before or after the inspection and testing of the product. In the event that it is established to Purmo Group's reasonable satisfaction that a valid Warranty claim has been made in respect of the product, then any inspection charge which has been paid will be refunded in full by Purmo Group.

# Specification

| Feature                              | Unit            | Value                          |
|--------------------------------------|-----------------|--------------------------------|
| Etim Class                           |                 | EC000593 - Radiator (electric) |
| Model                                |                 | Standard                       |
| Mounting method                      |                 | Wall model                     |
| Mounting direction                   |                 | Horizontal                     |
| Material front                       |                 | Steel                          |
| Material heating element             |                 | Steel                          |
| Oil-/fluid-filled                    |                 | Yes                            |
| With decorative finish               |                 | Yes                            |
| Heating capacity                     | Watt (W)        | 500, 750, 1000, 1250           |
| Supply voltage min                   | Volt (V)        | 230 - 240                      |
| Frequency supply voltage min         | Hertz (Hz)      | 50, 50 - 50                    |
| Electrical connection                |                 | Connection cable with plug     |
| Connection cable length              | Metre (m)       | 1.3                            |
| Length connection cord               | Metre (m)       | 1.3                            |
| Position control panel               |                 | None                           |
| Suitable for wireless remote control |                 | Yes                            |
| With remote control                  |                 | Yes                            |
| Power control                        |                 | Electronic                     |
| Air exhaust                          |                 | Other                          |
| Colour                               |                 | White                          |
| RAL-number                           |                 | 9016                           |
| Width                                | Millimetre (mm) | 485, 635, 860, 1010            |
| Height                               | Millimetre (mm) | 600                            |
| Depth                                | Millimetre (mm) | 106                            |
| Weight                               | Kilogram (kg)   | 17.43, 23, 29.279, 34.96       |
| Degree of protection (IP)            |                 | IP44                           |
| Protection class                     |                 | II                             |
| With overheating protection          |                 | Yes                            |
| Frost protection circuit             |                 | Yes                            |
| Digital indication                   |                 | Yes                            |
| With presence indicator              |                 | Yes                            |
| With time switch clock               |                 | Yes                            |
| Programmable                         |                 | Yes                            |
| Adaptive (self-learning)             |                 | Yes                            |
| Consumption indication               |                 | Yes                            |
| Open window detection                |                 | Yes                            |
| Compatible with Apple HomeKit        |                 | No                             |

| Feature                          | Unit | Value |
|----------------------------------|------|-------|
| Compatible with Google Assistant |      | No    |
| Operation by app                 |      | No    |
| Compatible with Amazon Alexa     |      | No    |
| IFTTT support available          |      | No    |

# Resources

| Document Description                     | Document Type      | Link  |
|--|--------------------|---|
| Myson Electric Decor Brochure            | Brochure           | <a href="https://asset.productmarketingcloud.com/api/assetstorage/3577_e40b9c44-2a79-482d-a950-7a72d9f148ff">https://asset.productmarketingcloud.com/api/assetstorage/3577_e40b9c44-2a79-482d-a950-7a72d9f148ff</a> |
| Myson Complete Solutions - Full Brochure | Brochure           | <a href="https://asset.productmarketingcloud.com/api/assetstorage/3577_24872a57-c3a5-4956-ab4b-dfa3b522c19b">https://asset.productmarketingcloud.com/api/assetstorage/3577_24872a57-c3a5-4956-ab4b-dfa3b522c19b</a> |
| Wiring Diagram                           | Brochure           | <a href="https://asset.productmarketingcloud.com/api/assetstorage/3577_d3a15ace-9366-4736-87e6-c3e672c64476">https://asset.productmarketingcloud.com/api/assetstorage/3577_d3a15ace-9366-4736-87e6-c3e672c64476</a> |
| Brochure                                 | Brochure           | <a href="https://asset.productmarketingcloud.com/api/assetstorage/3577_19ad1120-20a3-489b-b536-3a7c36b17752">https://asset.productmarketingcloud.com/api/assetstorage/3577_19ad1120-20a3-489b-b536-3a7c36b17752</a> |
| Tecnical Brochure                        | Technical Brochure | <a href="https://asset.productmarketingcloud.com/api/assetstorage/3577_346a27ed-9a71-4e5e-95f7-1d280ded664b">https://asset.productmarketingcloud.com/api/assetstorage/3577_346a27ed-9a71-4e5e-95f7-1d280ded664b</a> |

# Items

| Local Code | Global Item Code | Item Description                      |
|------------|------------------|---------------------------------------|
| E6V20060   | F8B2006004501B00 | Type 20 600h x 485w - Electric Décor  |
| E8V20060   | F8B2006006001B00 | Type 20 600h x 635w - Electric Décor  |
| E11V20060  | F8B2006008301B00 | Type 20 600h x 860w - Electric Décor  |
| E13V20060  | F8B2006009801B00 | Type 20 600h x 1010w - Electric Décor |