


Product Data Sheet

1/27/2025

Saxby

UK - Myson

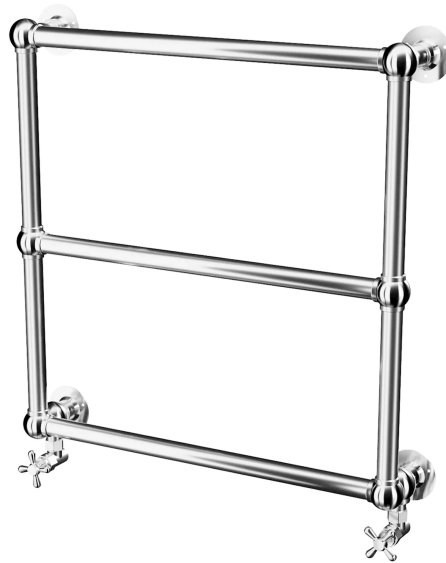

- Functional design
- High-quality chrome finish
- Dual fuel options
- Suitable for various systems
- Quality build

Description

Those looking for a simple, traditional towel radiator find the perfect fit in Saxby. This towel rail combines style and function in a classic design, with a polished chrome plated finish. Made from quality brass, Saxby is suitable for all hydronic heating systems, including direct systems, and offers optional dual fuel functionality.

Area of Application

Traditional style towel warmer suitable for domestic and commercial heating applications. Designed for 2-pipe pumped indirect systems and direct systems. Comes with 2 x ½" BSP as standard. Can be used with a Dual Fuel Heater Kit for flexible use.

Selection Criteria

Range of sizes and heat outputs available. For quick selection, use our brochure.

Basic User Instructions

Install Saxby with Radiator Valves or Thermostatic Radiator Valves for room temperature control. The PTC Dual Fuel Heater Kits allow use of the towel warmer in warmer months without turning on the entire heating system. The kit is self-regulating, ensuring optimal performance.

Prescription text specifiers

Saxby is a traditional style towel warmer manufactured from high-quality brass. It is designed for 2-pipe pumped indirect domestic and commercial heating applications and direct systems. The product comes with 2 x ½" BSP as standard, along with brackets, air vent, and plug. Saxby can be installed with a Dual Fuel Heater Kit for functionality in warmer months when central heating may be turned off. PTC Dual Fuel Heater Kits are self-regulating. The product is finished in polished chrome, suitable for all hydronic heating systems, and offers dual fuel options for enhanced flexibility.

Warranty

For your additional peace of mind, Purmo Group gives the following Warranty against manufacturing defect. Your statutory rights are not affected by this Warranty.

Subject as provided below, Purmo Group warrants to the original purchaser at the original installation site that its products will be free from defects in materials and workmanship for the following periods:

- Hydronic Radiators: 10 years from date of purchase.*
- Fan Assisted Radiators (ULOW-E2): 2 years from date of purchase.*
- Fan Convectors: 2 years from date of purchase.
- Hydronic Underfloor Heating: 10 years for the pipe from date of purchase.
- Hydronic Underfloor Heating: 2 years on accessories, actuators, ball valves, controls, expansion vessels, fittings, low loss headers, manifolds, mixer control groups & tooling from date of purchase.
- Hydronic Underfloor Heating: 12 months on all pumps from date of purchase.
- Electric Underfloor Heating: 10 years from date of purchase (except programmer & sensor).
- Electric Radiators and Towel Warmers: 2 years from date of purchase.*
- Hydronic Towel Warmers: 5 to 10 years from date of purchase depending on product type.*
- Myson Radiator Valves and Controls: 2 to 5 years from date of purchase, depending on range.

*Products which are exposed to prolonged extreme conditions, such as high humidity or severe cold/condensation, may be subject to deterioration. This is not a result of any manufacturing defect. Products installed in these circumstances will be subject to a warranty period of twelve months only.

The original purchaser's remedy for breach of this Warranty is expressly limited to repair or replacement of any part or parts found to be defective under conditions of normal service and use during the above Warranty period and does not extend to Purmo Group being liable for any

incidental, special or consequential damages or losses whatsoever, such as loss of use of the product, inconvenience or lost profits.

This Warranty does not cover any defect, damage or malfunction in the product which is due to: failure to comply in any respect with Purmo Group's installation, maintenance or operating instructions; faulty storage,

handling, installation or repair; mis-use; neglect; accident; abuse; or general wear and tear.

Before this warranty can be activated, the original purchaser will be required to prove, with supporting documentation, the date and place of purchase, as Purmo Group may need to conduct its investigation into

the alleged defect. This should be within 28 days of the date when the defect was discovered or ought to have reasonably discovered the defect.

Purmo Group reserves the right to make a reasonable charge for inspecting and testing any product which is subject to a Warranty claim and the rights conferred by the Warranty are conditional upon the payment of such charge. The charge may be made, at Purmo Group's discretion, either before or after the inspection and testing of the product. In the event that it is established to Purmo Group's reasonable satisfaction that a valid Warranty claim has been made in respect of the product, then any inspection charge which has been paid will be refunded in full by Purmo Group.

Specification

Feature	Unit	Value
Etim Class		EC010048 - Accessories/spare parts for radiator fittings, EC010136 - Radiator stop valve, EC011023 - Tube radiator
Mounting direction		Horizontal
Factor K		9.489
Heat emission according to EN 442 20 °C – 55/45 [Btu/h]		367
Max. operating temperature	Degrees celsius (°C)	110
Item weight	Kilogram (kg)	0.302, 0.312, 0.345, 0.354, 0.39, 0.3965, 0.402, 0.405, 0.45, 7.5
Heat emission according to EN 442 20 °C – 75/65 [Btu/h]		679
Watt Absolute	Watt (W)	199
Mounting method		On wall
Colour		White
Height	Millimetre (mm)	693
Depth	Millimetre (mm)	140
RAL-number		9016
Surface protection		Lacquered
Swivelling		No
Material quality		Other
Number of tubes		3
Length	Millimetre (mm)	693
Material		Steel
With mounting material		Yes
Applicable with hot tap water circuit		No
Heat emission according to EN 442 20 °C Watt (W) - 55/45		108
Towel radiator model		Yes
Connection 1, bottom left		Inlet/outlet flow
Connection 8, bottom right		Inlet/outlet flow
Number of standard connections		2
With fan heater		No
With drain valve		No
With de-aerator		Yes
With de-aeration connection		Yes
Max. operating pressure	Bar (bar)	6
Installation		Vertical

Feature	Unit	Value
With drain possibility (connection)		Yes
Thread connection		Internal thread
With towel holder		No
Thread size (inch)		1/2 inch
Heat emission according to EN 442 20 °C Watt (W) - 75/65		199
With side lining		No
With single-point connection		No
With integrated thermostatic valve		No
With blind stops		Yes
Shape of radiation tube		Round
Depth from wall to front side	Millimetre (mm)	140
With top cladding		No
Shape of collector		Round
Radiant tube		Horizontal
Radiator design		Straight
With mirror		No
With consoles		Yes
Suitable for damp space		Yes
Standard colour		Yes
Degree of gloss		Glossy

Resources

Document Description	Document Type	Link
Myson Complete Solutions - Full Brochure	Brochure	https://asset.productmarketingcloud.com/api/assetstorage/3577_24872a57-c3a5-4956-ab4b-dfa3b522c19b
Myson Saxby Brochure	Brochure	https://asset.productmarketingcloud.com/api/assetstorage/3577_d8b76364-778f-4b65-8884-c719a33402c7
Myson Towel Warmer Accessory Brochure	Brochure	https://asset.productmarketingcloud.com/api/assetstorage/3577_4fe4000e-8d2d-4051-b8f8-c369afc56a1a
Myson Traditional Towel Warmer Range Brochure	Brochure	https://asset.productmarketingcloud.com/api/assetstorage/3577_142fc909-d562-4ad4-97b1-1f7e115b8e9a
		https://asset.productmarketingcloud.com/api/assetstorage/3577_975639df-d418-45d2-bb3a-495ab84c8555
Myson Towel Warmers - range brochure	Brochure	https://asset.productmarketingcloud.com/api/assetstorage/3577_5781fce0-5efe-4895-b2bb-1b6f125c165b

Items

HVAC Code	Global Item Code	Item Description
	F74-MTAB34C1	693h x 693w - Saxby
	FDII60015AAYBHUK1	Decorative 15mm LS Or Wheelhead Straight Polished Chrome - Traditional
	AZ1-MTZDISCREETC	Discreet Wire Kit
	FDII60015ABYBHUK1	Decorative 15mm LS Or Wheelhead Angle Polished Chrome - Traditional
	FDII80010AAYBHUK1	Decorative 10mm LS Or WH Strght Polished Chrome C/W Pushfit 90o Elbow
	FDII80010ABYBHUK1	Decorative 10mm LS Or WH Angle Polished Chrome C/W Pushfit 90o Elbow
	FDII80015AAYBHUK1	Decorative 15mm LS Or WH Strght Polished Chrome C/W Pushfit 90o Elbow
	FDII80015ABYBHUK1	Decorative 15mm LS Or WH Angle Polished Chrome C/W Pushfit 90o Elbow
	FDII90015AAYBHUK1	Decorative 15mm LS Or Wheelhead Straight Polished Chrome - Slimline
	FDII90015ABYBHUK1	Decorative 15mm LS Or Wheelhead Angle Polished Chrome - Slimline
DEC15LWAC	FDII70015ABYBHUK1	
DEC15LWSC	FDII70015AAYBHUK1	