
# **Product Data Sheet**

1/27/2025

# Stour

UK - Myson

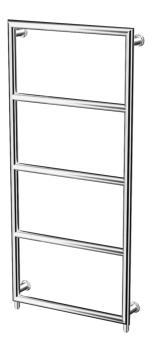

- Simple, elegant design
- High quality chrome finish
- Dual fuel kit available
- Suitable for direct systems
- Hydronic compatible

### Description

The Stour is a beautifully simple frame and rail design towel warmer that looks classy and elegant in any bathroom. Manufactured from quality brass with a highly polished chrome finish, it is suitable for all hydronic systems, including direct systems, and comes with a dual fuel option.

#### Area of Application

Traditional style towel warmer suitable for 2-pipe pumped indirect domestic and commercial heating applications, including direct systems. 2 x ½8#34; BSP as standard. Can be installed with a Dual Fuel Heater Kit for use in warmer months when central heating is off. Self-regulating.

#### Selection Criteria

Range of sizes and heat outputs available.

#### **Basic User Instructions**

Install with Radiator Valves or Thermostatic Radiator Valves for room temperature control. Optional PTC Dual Fuel Heater Kits can be installed for functionality in warmer months without needing the entire heating system on.

### Prescription text specifiers

Stour is a traditional style towel warmer made from high quality brass and finished with a polished chrome plate. Suitable for 2-pipe pumped indirect domestic and commercial heating applications as well as direct systems. It includes standard 2 x 1/2" BSP connections, and comes with brackets, air vent, and plug. Certified and tested to BS EN 442, and UKCA marked. Maximum working pressure is 5.3 bar, tested to 6.9 bar. A PTC Dual Fuel Heater Kit is available for year-round functionality. The Stour combines form and function, adding a classy look to any bathroom while providing flexible towel warming options.

### Warranty

For your additional peace of mind, Purmo Group gives the following Warranty against manufacturing defect. Your statutory rights are not affected by this Warranty. Subject as provided below, Purmo Group warrants to the original purchaser at the original installation site that its products will be free from defects in materials and workmanship for the following periods:

- · Hydronic Radiators: 10 years from date of purchase.\*
- Fan Assisted Radiators (ULOW-E2): 2 years from date of purchase.\*
- Fan Convectors: 2 years from date of purchase.
- Hydronic Underfloor Heating: 10 years for the pipe from date of purchase.
- · Hydronic Underfloor Heating: 2 years on accessories, actuators, ball valves, controls, expansion vessels, fittings, low loss headers, manifolds, mixer control groups & toolingfrom date of purchase.
- Hydronic Underfloor Heating: 12 months on all pumps from date of purchase.
- Electric Underfloor Heating: 10 years from date of purchase (except programmer & sensor).
- Electric Radiators and Towel Warmers: 2 years from date of purchase.\*
- Hydronic Towel Warmers: 5 to 10 years from date of purchase depending on product type.\*
- Myson Radiator Valves and Controls: 2 to 5 years from date of purchase, depending on range.
- \*Products which are exposed to prolonged extreme conditions, such as high humidity or severe cold/condensation, may be subject to deterioration. This is not a result of any manufacturing defect. Products installed in these circumstances will be subject to a warranty period of twelve months only.

The original purchaser's remedy for breach of this Warranty is expressly limited to repair or replacement of any part or parts found to be defective under conditions of normal service and use during the above Warranty period and does not extend to Purmo Group being liable for any incidental, special or consequential damages or losses whatsoever, such as loss of use of the

product, inconvenience or lost profits.

This Warranty does not cover any defect, damage or malfunction in the product which is due to: failure to comply in any respect with Purmo Group's installation, maintenance or operating instructions; faulty storage,

handling, installation or repair; mis-use; neglect; accident; abuse; or general wear and tear. Before this warranty can be activated, the original purchaser will be required to prove, with supporting documentation, the date and place of purchase, as Purmo Group may need to conduct its investigation into

the alleged defect. This should be within 28 days of the date when the defect was discovered or ought to have reasonably discovered the defect.

Purmo Group reserves the right to make a reasonable charge for inspecting and testing any product which is subject to a Warranty claim and the rights conferred by the Warranty are conditional upon the payment of such charge. The charge may be made, at Purmo Group's discretion, either before or after the inspection and testing of the product. In the event that it is established to Purmo Group's reasonable satisfaction that a valid Warranty claim has been made in respect of the product, then any inspection charge which has been paid will be refunded in full by Purmo Group.

# **Specification**

Feature	Unit	Value
Etim Class		EC010048 - Accessories/spare parts for
		radiator fittings, EC010136 - Radiator stop
		valve, EC011023 - Tube radiator
Mounting direction		Vertical
Heat emission according to EN 442	2 20 ℃	356, 505
- 55/45 [Btu/h]		
Max. operating temperature	Degrees celsius (°C)	110
Item weight	Kilogram (kg)	0.302, 0.312, 0.345, 0.354, 0.39, 0.3965,
		0.402, 0.405, 0.45, 5.2, 7.6
Heat emission according to EN 442 20 °C		659, 935
– 75/65 [Btu/h]		
Watt Absolute	Watt (W)	193, 274
Mounting method		On wall
Colour		White
Height	Millimetre (mm)	1000, 642
Depth	Millimetre (mm)	86
RAL-number		9016
Surface protection		Lacquered
Swivelling		No
Material quality		Other
Number of tubes		3, 5
Length	Millimetre (mm)	642
Material		Steel
With mounting material		Yes
Applicable with hot tap water circu	uit	No
Heat emission according to EN 44.	2 20 °C Watt (W)	104, 148
Towel radiator model		Yes
Connection 1, bottom left		Inlet/outlet flow
Connection 8, bottom right		Inlet/outlet flow
Number of standard connections		2
With fan heater		No
With drain valve		No
With de-aerator		Yes
With de-aeration connection		Yes
Max. operating pressure	Bar (bar)	6
Installation		Vertical
With drain possibility (connection)		Yes
, 5,(===================================		

Feature	Unit	Value
Thread connection		Internal thread
With towel holder		No
Thread size (inch)		1/2 inch
Heat emission according to EN 442 20 °	C Watt (W)	193, 274
- 75/65		
With side lining		No
With single-point connection		No
With integrated thermostatic valve		No
With blind stops		Yes
Shape of radiation tube		Round
Depth from wall to front side	Millimetre (mm)	86 - 98
With top cladding		No
Shape of collector		Round
Radiant tube		Horizontal
Radiator design		Straight
With mirror		No
With consoles		Yes
Suitable for damp space		Yes
Standard colour		Yes
Degree of gloss		Glossy

## Resources

Document Description	Document Type	Link
Myson Complete Solutions - Full Brochure	Brochure	https://asset.productmarketingcloud.co m/api/assetstorage/3577_24872a57-c3a 5-4956-ab4b-dfa3b522c19b
Myson Contemporary Towel Warmer Range Brochure	Brochure	https://asset.productmarketingcloud.co m/api/assetstorage/3577_ae11a75b-1ad 9-4356-a6c2-b287c1d6c94c
Myson Stour Brochure	Brochure	https://asset.productmarketingcloud.co m/api/assetstorage/3577_7873b69d-4a 95-465c-8c15-23680814f898
Myson Towel Warmer Accessory Brochure	Brochure	https://asset.productmarketingcloud.co m/api/assetstorage/3577_4fe4000e-8d2 d-4051-b8f8-c369afc56a1a
Myson Towel Warmers - range brochure Brochure		https://asset.productmarketingcloud.co m/api/assetstorage/3577_5781fce0-5efe -4895-b2bb-1b6f125c165b

## Items

2w - Stour 15mm LS Or Wheelhead clished Chrome - Traditional Vire Kit 42w - Stour 15mm LS Or Wheelhead Angle
olished Chrome - Traditional /ire Kit 42w - Stour
/ire Kit 42w - Stour
42w - Stour
: 15mm LS Or Wheelhead Anale
hrome - Traditional
e 10mm LS Or WH Strght
hrome C/W Pushfit 90o Elbow
e 10mm LS Or WH Angle
throme C/W Pushfit 90o Elbow
: 15mm LS Or WH Strght
hrome C/W Pushfit 90o Elbow
: 15mm LS Or WH Angle
hrome C/W Pushfit 90o Elbow
15mm LS Or Wheelhead
olished Chrome - Slimline
15mm LS Or Wheelhead Angle
hrome - Slimline