


Product Data Sheet

9/1/2024

Towel Warmers

Thirlmere

UK - Myson

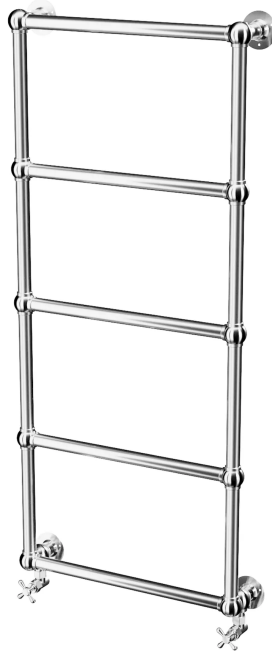

- **Elegant design**
- **High-quality chrome finish**
- **Dual fuel kit available**
- **Suitable for direct systems**
- **Tested to high-pressure standards**

Description

The Myson Thirlmere is an elegant, minimalist towel warmer that projects classic and simple style. It makes a subtle but important addition to any bathroom - unobtrusively and quietly satisfying the need for both style and function. Thirlmere is manufactured from quality brass and has a highly polished chrome plated finish. Suitable for all hydronic systems, including direct systems, and also dual fuel option.

Area of Application

The Thirlmere towel warmer radiators are ideal for traditional style bathrooms in both domestic and commercial settings. Suitable for 2-pipe pumped indirect systems, direct systems, and dual fuel options. Tested up to 6.9 bar with working pressures up to 5.3 bar.

Selection Criteria

Range of sizes and heat outputs available. Use our design service for precise selection, or consult our brochure for quick choices.

Basic User Instructions

Install the Thirlmere towel radiator with Radiator Valves or Thermostatic Radiator Valves for optimal room temperature control. A PTC Dual Fuel Heater Kit can be installed, allowing the towel warmer to be used in warmer months without activating the full heating system. Ensure all connections are secured and tested.

Prescription text specifiers

The Thirlmere towel radiator, crafted from quality brass and finished in polished chrome, is ideal for 2-pipe pumped indirect and direct domestic or commercial applications. Connections: 2 x ½" BSP as standard; bracket, air vent, and plug included. Tested to 6.9 bar, with a working pressure of up to 5.3 bar. Includes a PTC Dual Fuel Heater Kit with APM® technology. Certified to BS EN 442 & EN 442, carrying the CE & UKCA Mark. Backed by a 10-year guarantee against manufacturing defects. Non-stock item; delivery in 8-10 weeks. Install with Radiator Valves or Thermostatic Radiator Valves for optimal temperature control.

Warranty

For your additional peace of mind, Purmo Group gives the following Warranty against manufacturing defect. Your statutory rights are not affected by this Warranty.

Subject as provided below, Purmo Group warrants to the original purchaser at the original installation site that its products will be free from defects in materials and workmanship for the following periods:

- Hydronic Radiators: 10 years from date of purchase.*
- Fan Assisted Radiators (ULOW-E2): 2 years from date of purchase.*
- Fan Convectors: 2 years from date of purchase.
- Hydronic Underfloor Heating: 10 years for the pipe from date of purchase.
- Hydronic Underfloor Heating: 2 years on accessories, actuators, ball valves, controls, expansion vessels, fittings, low loss headers, manifolds, mixer control groups & tooling from date of purchase.
- Hydronic Underfloor Heating: 12 months on all pumps from date of purchase.
- Electric Underfloor Heating: 10 years from date of purchase (except programmer & sensor).
- Electric Radiators and Towel Warmers: 2 years from date of purchase.*
- Hydronic Towel Warmers: 5 to 10 years from date of purchase depending on product type.*
- Myson Radiator Valves and Controls: 2 to 5 years from date of purchase, depending on range.

*Products which are exposed to prolonged extreme conditions, such as high humidity or severe cold/condensation, may be subject to deterioration. This is not a result of any manufacturing defect. Products installed in these circumstances will be subject to a warranty period of twelve months only.

The original purchaser's remedy for breach of this Warranty is expressly limited to repair or replacement of any part or parts found to be defective under conditions of normal service and use during the above Warranty period and does not extend to Purmo Group being liable for any incidental, special or consequential damages or losses whatsoever, such as loss of use of the product, inconvenience or lost profits.

This Warranty does not cover any defect, damage or malfunction in the product which is due to: failure to comply in any respect with Purmo Group's installation, maintenance or operating instructions; faulty storage,

handling, installation or repair; mis-use; neglect; accident; abuse; or general wear and tear.

Before this warranty can be activated, the original purchaser will be required to prove, with supporting documentation, the date and place of purchase, as Purmo Group may need to conduct its investigation into

the alleged defect. This should be within 28 days of the date when the defect was discovered or ought to have reasonably discovered the defect.

Purmo Group reserves the right to make a reasonable charge for inspecting and testing any product which is subject to a Warranty claim and the rights conferred by the Warranty are conditional upon the payment of such charge. The charge may be made, at Purmo Group's discretion, either before or after the inspection and testing of the product. In the event that it is established to Purmo Group's reasonable satisfaction that a valid Warranty claim has been made in respect of the product, then any inspection charge which has been paid will be refunded in full by Purmo Group.

Specification

Feature	Unit	Value
Etim Class		EC011023 - Tube radiator
Material		Steel
Material quality		Other
Number of tubes		5
Height	Millimetre (mm)	1303
Length	Millimetre (mm)	540
Depth	Millimetre (mm)	140
Depth from wall to front side min	Millimetre (mm)	140, 140 - 140
Shape of radiation tube		Round
Shape of collector		Round
Installation		Vertical
Radiant tube		Horizontal
Radiator design		Straight
Towel radiator model		Yes
Heat emission according to EN 442 20 °C Watt (W) - 55/45		122
Heat emission according to EN 442 20 °C Watt (W) - 75/65		226
Heat emission according to EN 442 20 °C Watt (W) - 70/40		1366
Max. operating pressure	Bar (bar)	5.3
With fan heater		No
Standard colour		Yes
Colour		White
RAL-number		9016
Degree of gloss		Glossy
Surface protection		Lacquered
With towel holder		No
With mirror		No
Mounting method		On wall
With side lining		No
With top cladding		No
Swivelling		No
Applicable with hot tap water circuit		No
Number of standard connections		2
Connection 1, bottom left		Inlet/outlet flow
Connection 8, bottom right		Inlet/outlet flow
Thread size (inch)		1/2 inch

Feature	Unit	Value
With single-point connection		No
Thread connection		Internal thread
Suitable for damp space		Yes
With de-aeration connection		Yes
With de-aerator		Yes
With drain possibility (connection)		Yes
With drain valve		No
With integrated thermostatic valve		No
With consoles		Yes
Suitable for electrical element		No
With blind stops		Yes
With mounting material		Yes
Mounting direction		Vertical
Heat emission according to EN 442 20 °C – 55/45 [Btu/h]		416
Max. operating temperature	Degrees celsius (°C)	110
Heat emission according to EN 442 20 °C – 75/65 [Btu/h]		770
Watt Absolute	Watt (W)	226
Item weight	Kilogram (kg)	10.5

Resources

Document Description	Document Type	Link
Myson Complete Solutions - Full Brochure	Brochure	https://asset.productmarketingcloud.com/api/assetstorage/3577_24872a57-c3a5-4956-ab4b-dfa3b522c19b
Myson Thirlmere Brochure	Brochure	https://asset.productmarketingcloud.com/api/assetstorage/3577_5641c296-281b-4b47-8a56-f08bb601bc7b
Myson Towel Warmer Accessory Brochure	Brochure	https://asset.productmarketingcloud.com/api/assetstorage/3577_4fe4000e-8d2d-4051-b8f8-c369afc56a1a
Myson Traditional Towel Warmer Range Brochure	Brochure	https://asset.productmarketingcloud.com/api/assetstorage/3577_142fc909-d562-4ad4-97b1-1f7e115b8e9a
Myson Towel Warmers - range brochure	Brochure	https://asset.productmarketingcloud.com/api/assetstorage/3577_5781fce0-5efe-4895-b2bb-1b6f125c165b

Items

Local Code	Global Item Code	Item Description
B35C1	F7G-MTAB35C1	1303h x 540w - Thirlmere