
# **Product Data Sheet**

9/1/2024

Towel Warmers

## Inn

UK - Myson

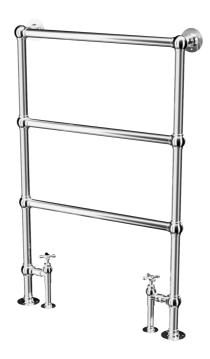

- Quality chrome finish
- Simple, understated design
- Dual fuel kit available
- Manufactured from high-quality brass
- Suitable for direct systems

### Description

The Myson Inn is a simple and stylish floor-standing towel warmer that will enhance any bathroom. It has a classic, minimalistic look that is also very practical, making it an ideal choice for creating an understated, traditional feel. It is manufactured from quality brass with a highly polished chrome finish. Suitable for hydronic heating systems, and optional dual fuel. Chrome model is suitable for direct systems.

### Area of Application

Traditional style towel warmer manufactured with high-quality brass. Suitable for hydronic heating systems, including direct systems, and can be installed with a Dual Fuel Heater Kit for use in warmer months without central heating.

#### Selection Criteria

Range of sizes and heat outputs available. Refer to our design service or quick selection brochure for detailed calculations.

#### **Basic User Instructions**

Install with radiator valves or thermostatic radiator valves for room temperature control. The PTC Dual Fuel Heater Kits can be installed to use the towel warmer during warmer months without activating the entire heating system.

## Prescription text specifiers

The Myson Inn is a floor-standing towel warmer manufactured from high-quality brass with a polished chrome finish. Suitable for both hydronic and direct heating systems, it features ½" BSP connections, an integrated air vent, and a pressure-tested rating up to 6.9 bar with a working pressure of 5.3 bar. The Inn can be paired with a PTC Dual Fuel Heater Kit, which is self-regulating for use during warmer months. The towel warmer is ideal for adding a touch of classic style to any bathroom and comes with a 10-year guarantee against manufacturing defects. Installation requires radiator valves or thermostatic radiator valves for temperature control.

#### Warranty

For your additional peace of mind, Purmo Group gives the following Warranty against manufacturing defect. Your statutory rights are not affected by this Warranty. Subject as provided below, Purmo Group warrants to the original purchaser at the original installation site that its products will be free from defects in materials and workmanship for the following periods:

- Hydronic Radiators: 10 years from date of purchase.\*
- Fan Assisted Radiators (ULOW-E2): 2 years from date of purchase.\*
- Fan Convectors: 2 years from date of purchase.
- Hydronic Underfloor Heating: 10 years for the pipe from date of purchase.
- · Hydronic Underfloor Heating: 2 years on accessories, actuators, ball valves, controls, expansion vessels, fittings, low loss headers, manifolds, mixer control groups & toolingfrom date of purchase.
- Hydronic Underfloor Heating: 12 months on all pumps from date of purchase.
- Electric Underfloor Heating: 10 years from date of purchase (except programmer & sensor).
- Electric Radiators and Towel Warmers: 2 years from date of purchase.\*
- Hydronic Towel Warmers: 5 to 10 years from date of purchase depending on product type.\*
- Myson Radiator Valves and Controls: 2 to 5 years from date of purchase, depending on range.
- \*Products which are exposed to prolonged extreme conditions, such as high humidity or severe cold/condensation, may be subject to deterioration. This is not a result of any manufacturing defect. Products installed in these circumstances will be subject to a warranty period of twelve months

The original purchaser's remedy for breach of this Warranty is expressly limited to repair or replacement of any part or parts found to be defective under conditions of normal service and use during the above Warranty period and does not extend to Purmo Group being liable for any

incidental, special or consequential damages or losses whatsoever, such as loss of use of the product, inconvenience or lost profits.

This Warranty does not cover any defect, damage or malfunction in the product which is due to: failure to comply in any respect with Purmo Group's installation, maintenance or operating instructions; faulty storage,

handling, installation or repair; mis-use; neglect; accident; abuse; or general wear and tear. Before this warranty can be activated, the original purchaser will be required to prove, with supporting documentation, the date and place of purchase, as Purmo Group may need to conduct its investigation into

the alleged defect. This should be within 28 days of the date when the defect was discovered or ought to have reasonably discovered the defect.

Purmo Group reserves the right to make a reasonable charge for inspecting and testing any product which is subject to a Warranty claim and the rights conferred by the Warranty are conditional upon the payment of such charge. The charge may be made, at Purmo Group's discretion, either before or after the inspection and testing of the product. In the event that it is established to Purmo Group's reasonable satisfaction that a valid Warranty claim has been made in respect of the product, then any inspection charge which has been paid will be refunded in full by Purmo Group.

# **Specification**

| Feature  | Unit            | Value                    |
|--|-----------------|--------------------------|
| Etim Class   |                 | EC011023 - Tube radiator |
| Material   |                 | Steel                    |
| Material quality   |                 | Other                    |
| Number of tubes  |                 | 3                        |
| Height   | Millimetre (mm) | 955                      |
| Length   | Millimetre (mm) | 693                      |
| Depth  | Millimetre (mm) | 140                      |
| Depth from wall to front side min                        | Millimetre (mm) | 124 - 140                |
| Shape of radiation tube                                  |                 | Round                    |
| Shape of collector                                       |                 | Round                    |
| Installation   |                 | Vertical                 |
| Radiant tube   |                 | Horizontal               |
| Radiator design  |                 | Straight                 |
| Towel radiator model                                     |                 | Yes                      |
| Heat emission according to EN 442 20 - 55/45             | °C Watt (W)     | 79                       |
| Heat emission according to EN 442 20 - 75/65             | °C Watt (W)     | 146                      |
| Heat emission according to EN 442 20 - 70/40             | °C Watt (W)     | 2168                     |
| Max. operating pressure                                  | Bar (bar)       | 5.3                      |
| With fan heater  | Dai (Dai)       | No                       |
| Standard colour  |                 | Yes                      |
| Colour   |                 | White                    |
| RAL-number   |                 | 9016                     |
| Degree of gloss  |                 | Glossy                   |
| Surface protection                                       |                 | Lacquered                |
| With towel holder  |                 | No                       |
| With mirror  |                 | No                       |
| Mounting method  |                 | On wall                  |
| With side lining   |                 | No                       |
| With top cladding  |                 | No                       |
|  |                 |                          |
| Swivelling Applicable with hot tap water circuit         |                 | No<br>No                 |
| Number of standard connections                           |                 | 2                        |
|  |                 | Inlet/outlet flow        |
| Connection 1, bottom left                                |                 |                          |
| Connection 8, bottom right  Thread size (iash)           |                 | Inlet/outlet flow        |
| Thread size (inch)  4   Product Data Sheet Inc. 9/1/2024 |                 | 1/2 inch                 |

<sup>4 |</sup> Product Data Sheet Inn, 9/1/2024

| Feature   | Unit                 | Value           |
|---|----------------------|-----------------|
| With single-point connection                            |                      | No              |
| Thread connection                                       |                      | Internal thread |
| Suitable for damp space                                 |                      | Yes             |
| With de-aeration connection                             |                      | Yes             |
| With de-aerator   |                      | Yes             |
| With drain possibility (connection)                     |                      | Yes             |
| With drain valve  |                      | No              |
| With integrated thermostatic valve                      |                      | No              |
| With consoles   |                      | Yes             |
| Suitable for electrical element                         |                      | No              |
| With blind stops  |                      | Yes             |
| With mounting material                                  |                      | Yes             |
| Mounting direction                                      |                      | Horizontal      |
| Factor K  |                      | 12.385          |
| Heat emission according to EN 442 20 °C – 55/45 [Btu/h] |                      | 269             |
| Max. operating temperature                              | Degrees celsius (°C) | 110             |
| Heat emission according to EN 442 20 °C – 75/65 [Btu/h] |                      | 498             |
| Watt Absolute   | Watt (W)             | 146             |
| Item weight   | Kilogram (kg)        | 8.5             |

## Resources

| Document Description                                      | Document Type | Link   |
|---|---------------|--|
| Myson Inn Brochure  | Brochure      | https://asset.productmarketingcloud.co<br>m/api/assetstorage/3577_09618fce-a6d<br>2-4a7b-9dc1-69d797563917 |
| Myson Complete Solutions - Full Brochure                  | Brochure      | https://asset.productmarketingcloud.co<br>m/api/assetstorage/3577_24872a57-c3a<br>5-4956-ab4b-dfa3b522c19b |
| Myson Towel Warmer Accessory<br>Brochure                  | Brochure      | https://asset.productmarketingcloud.co<br>m/api/assetstorage/3577_4fe4000e-8d2<br>d-4051-b8f8-c369afc56a1a |
| Myson Traditional Towel Warmer Range Brochure<br>Brochure |               | https://asset.productmarketingcloud.co<br>m/api/assetstorage/3577_142fc909-d56<br>2-4ad4-97b1-1f7e115b8e9a |
| Myson Towel Warmers - range broch                         | ure Brochure  | https://asset.productmarketingcloud.co<br>m/api/assetstorage/3577_5781fce0-5efe<br>-4895-b2bb-1b6f125c165b |

# Items

| Local Code | Global Item Code | Item Description  |
|------------|------------------|-------------------|
| B24C1      | F6D-MTAB24C1     | 955h x 693w - Inn |