


Product Data Sheet

6/28/2025

90° angle EUROKONUS connector

UK - Myson

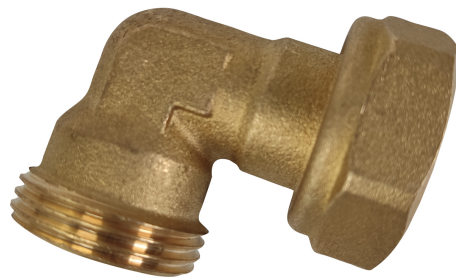

- Enhanced compatibility
- Efficient installation
- Reliable performance
- Space-saving design
- Durable construction

Description

The 90° Angle EUROKONUS Connector is an elbow used with a flow valve when pipe connections are made through the wall. Primarily designed for iVector S2 models, this connector offers a streamlined solution, facilitating efficient installation and ensuring robust connections to maintain optimal performance.

Area of Application

The 90° Angle EUROKONUS Connector is suitable for use when pipe connections pass through the wall and is compatible with flow valves. Ideal for the iVector S2 models, this connector ensures a secure and efficient connection in heating systems where wall connections are necessary.

Selection Criteria

The product selection depends on the orientation of the pipe connection. Use our design service or refer to our brochure for quick selection.

Basic User Instructions

Ensure the 90° Angle EUROKONUS Connector is used only with flow valves for wall pipe connections. Make sure all connections and fittings are securely tightened to prevent leaks. Always follow installation guidelines specific to iVector S2 models for optimal performance and safety. Regularly inspect for wear and tear.

Prescription text specifiers

The 90° Angle EUROKONUS Connector facilitates secure and efficient wall pipe connections for the iVector S2 models. Made from high-quality materials, it is designed for use with flow valves and ensures robust, reliable performance. This space-saving elbow connector is essential for any heating system where wall connections are necessary, providing enhanced compatibility and easy installation. It is an indispensable component for maintaining the efficiency and reliability of your heating system.

Warranty

For your additional peace of mind, Purmo Group gives the following Warranty against manufacturing defect. Your statutory rights are not affected by this Warranty.

Subject as provided below, Purmo Group warrants to the original purchaser at the original installation site that its products will be free from defects in materials and workmanship for the following periods:

- Hydronic Radiators: 10 years from date of purchase.*
- Fan Assisted Radiators (ULOW-E2): 2 years from date of purchase.*
- Fan Convectors: 2 years from date of purchase.
- Hydronic Underfloor Heating: 10 years for the pipe from date of purchase.
- Hydronic Underfloor Heating: 2 years on accessories, actuators, ball valves, controls, expansion vessels, fittings, low loss headers, manifolds, mixer control groups & tooling from date of purchase.
- Hydronic Underfloor Heating: 12 months on all pumps from date of purchase.
- Electric Underfloor Heating: 10 years from date of purchase (except programmer & sensor).
- Electric Radiators: 10 years from date of purchase on radiator unit*, electric controls & electronic components; 2 years from date of purchase.*
- Electric Towel Warmers: 2 years from date of purchase.*
- Hydronic Towel Warmers: 5 to 10 years from date of purchase depending on product type.*
- Myson Radiator Valves and Controls: 2 to 5 years from date of purchase, depending on range.

*Products which are exposed to prolonged extreme conditions, such as high humidity or severe cold/condensation, may be subject to deterioration. This is not a result of any manufacturing defect. Products installed in these circumstances will be subject to a warranty period of twelve months only.

The original purchaser's remedy for breach of this Warranty is expressly limited to repair or replacement of any part or parts found to be defective under conditions of normal service and use during the above Warranty period and does not extend to Purmo Group being liable for any incidental, special or consequential damages or losses whatsoever, such as loss of use of the product, inconvenience or lost profits.

This Warranty does not cover any defect, damage or malfunction in the product which is due to: failure to comply in any respect with Purmo Group's installation, maintenance or operating instructions; faulty storage,

handling, installation or repair; mis-use; neglect; accident; abuse; or general wear and tear.

Before this warranty can be activated, the original purchaser will be required to prove, with supporting documentation, the date and place of purchase, as Purmo Group may need to conduct its investigation into

the alleged defect. This should be within 28 days of the date when the defect was discovered or ought to have reasonably discovered the defect.

Purmo Group reserves the right to make a reasonable charge for inspecting and testing any product which is subject to a Warranty claim and the rights conferred by the Warranty are conditional upon the payment of such charge. The charge may be made, at Purmo Group's discretion, either before or after the inspection and testing of the product. In the event that it is established to Purmo Group's reasonable satisfaction that a valid Warranty claim has been made in respect of the product, then any inspection charge which has been paid will be refunded in full by Purmo Group.

Specification

| Feature | Unit | Value |
|--|----------------------|---------------------------------------|
| Etim Class | | EC003024 - Fitting with 2 connections |
| Depth | Millimetre (mm) | 20 |
| Weight | Kilogram (kg) | 0.15 |
| Model | | 2-part |
| Shape | | Elbow (fitting) |
| Connection 1 | | Internal thread metric |
| Connection 2 | | Internal thread metric |
| Length | Millimetre (mm) | 50 |
| Bend angle | Degrees (°) | 90 |
| Surface protection connection 1 | | Nickel-plated |
| Surface treatment connection 1 | | Pickled |
| Surface protection connection 2 | | Nickel-plated |
| Surface treatment connection 2 | | Pickled |
| Contour code connection 1 | | Several |
| Contour code connection 2 | | Several |
| Max. operating pressure at max. medium temperature | Bar (bar) | 10 |
| Main colour fitting | | Other |
| With connection indicator | | Yes |
| Capped | | No |
| With sealing rings/gaskets | | Yes |
| Nominal diameter connection 2 | | 3/4 inch (20) |
| Eccentric | | No |
| With drain valve | | No |
| With de-aerator | | No |
| Outer pipe diameter connection 1 | Millimetre (mm) | 20 |
| Outer pipe diameter connection 2 | Millimetre (mm) | 20 |
| With buffer stud | | No |
| Wall thickness, connection 1 | Millimetre (mm) | 3 |
| FM quality mark | | No |
| UL quality mark | | No |
| ULC quality mark | | No |
| LPCB quality mark | | No |
| Reducing | | No |
| Max. operating pressure at 20 °C | Bar (bar) | 10 |
| Medium temperature (continuous) | Degrees celsius (°C) | 70, 90 |
| Nominal diameter connection 1 | | 3/4 inch (20) |

| Feature | Unit | Value |
|------------------------------------|------|--------------------|
| With thermal insulation | | No |
| High tensile strength | | Yes |
| System-specific | | Yes |
| Material connection 1 | | Brass |
| Material connection 2 | | Brass |
| Material quality connection 1 | | CuZn39Pb3 (CW617N) |
| Material quality connection 2 | | CuZn39Pb3 (CW617N) |
| DIN-CERTCO certificate | | No |
| VdS quality mark | | No |
| With approval for TÜV | | No |
| DVGW quality mark for gas | | No |
| DVGW quality mark for water | | No |
| Certified according to NF 545 | | No |
| KIWA certified | | No |
| Gastec QA mark | | No |
| KOMO certified | | No |
| Gastec QA - AR 214 (H2) | | No |
| Type approval according to BBR/EKS | | No |

Resources

| Document Description | Document Type | Link |
|----------------------|---------------|------|
|----------------------|---------------|------|

Items

| Global Item Code | Item Description |
|------------------|-------------------------|
| AZ5H00AI020300N0 | 90o Eurokonus connector |